AR-M9942B

MicroBox with Celeron M 1GHz, Fanless Design, 4 x 10/100Mbps LAN, CF, Mini-PCI Slot, Serial Port, USB2.0 Port

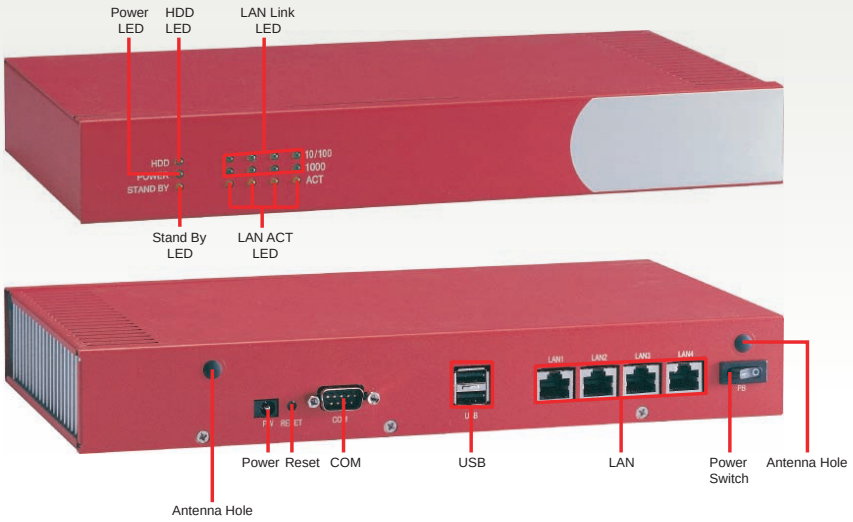

Features

- MicroBox Fanless Solution
- Celeron M 1GHz
- Support Auto-MDIX
- Support PXE Function
- Support Console Function

Specification

System

CPU	Intel Celeron M 1GHz Zero Cache
Chipset	Intel 852GM + Intel ICH4M
Memory	1 x 200-pin SO-DIMM socket support 200/266MHz DDR SDRAM up to 1GB
BIOS	Award
RTC	Chipset Included
WatchDog Timer	Software programmable 1~255 sec.
OS	Windows 2000/XP, Linux6.5 and above

Video

Video Interface	VGA (Onboard pin header)

Ethernet

Chipset	Broadcom BCM4401 (10/100Mbps) x 4
Connector	RJ45
LAN	4 x 10/100Mbps LAN
PXE	Yes
Bypass LAN	N/A
Auto-MDIX	Yes

Storage

HardDisk Storage	Ultra DMA
SSD	1 x Compact Flash socket (Support UDMA)

I/O

Serial Port	2 x RS-232 (1 x DB9, 1 x onboard pin header)
USB Port	4 x USB2.0 (2 x external ports, 2 x onboard pin header)
Mini PCI	1 x Mini-PCI slot
GPIO	8-bit Digital I/O
Keyboard/Mouse	PS/2 keyboard and mouse pin header

Mechanical & Environment

Dimension	299mm x 167.5mm x 41mm
Power Requirement	+12V Input: AC Power Adapter, Input range 115V AC 60GHz ~ 230V AC 50Hz
Operating Temp.	0~40°C (32~104°F)
Storage Temp.	-20~80°C (-4~176°F)
Relative Humidity	0 to 90% @ 40°C, non-condensing
Safety	CE FCC class A

Packing List

1. AR-M9942B x 1
2. Driver CD x 1
3. Console cable x 1
4. VGA cable x 1
5. PS/2 keyboard and mouse cable x 1
6. Power cord (Optional for USA or EU type) x 1
7. Power adaptor x 1

Ordering Information

AR-M9942B	MicroBox with Celeron M 1GHz, Fanless Design, 4 x 10/100Mbps LAN, CF, Mini-PCI Slot, Serial Port, USB2.0

Distribue par Anteor - www.anteor.com - Tel : 01 61 37 07 00